

# **DC Resistance Meters** 2840 Series



The 2840 Series DC resistance meters feature high accuracy and resolution measurements in the milliohm range. Both meters are ideally suited for measuring contact resistance of relays, switches, and PCB traces, typically outside the resistance range of multimeters. The vivid 4.3-inch TFT LCD color touch screen and keypad provide intuitive operation.

The 2841 model adds extended range, accuracy, temperature measurement and functions. Measure low resistivity materials with offset voltage compensation to reduce the influence of thermal EMF. Cable error detection displays a message when one of the terminals is open, which helps identify defective test leads or poor contact that can cause unreliable measurements.

The 2841 includes two temperature compensation

functions: correction (TC) and conversion ( $\Delta t$ ). The TC function corrects for ambient temperature changes that cause different resistance measurements of the same component. The temperature conversion ( $\Delta t$ ) function can be used to evaluate a coil's resistance before and after operation to calculate a temperature change. These additional features make the 2841 ideal for evaluating coils, motor windings, transformers, actuators and conductive materials.

Both meters feature low power resistance testing (LPR) modes and variable measurement speeds that are suited for a wide range of applications. The handler interface with high-speed measurement capabilities enable the 2840 Series to evaluate a large quantity of components and be integrated into an automated test system.

Model	2840	2841
Display Range	I μ $\Omega$ to 20 k $\Omega$	0.1 $\mu\Omega$ to 100 $M\Omega$
Basic Accuracy	0.1%	0.01%
Measurement Resolution	Ι μΩ	0.1 μΩ
Displayed Digits	4 1/2	5 1/2
Functions	R and LPR	R, R-T, T, LPR, LPR-T
Resistance Measurement Ranges	7 + Auto	II + Auto
Temperature Compensation	-	V
Number of Results Bins	3	10



Touch screen to zoom, select, and enter values

USB	LAN*	RS232

#### **Features & Benefits**

- 4.3-inch color touch screen
- 4-wire Kelvin test leads included
- Temperature measurement with correction\*
- Low power resistance mode to protect DUT
- Manual or auto ranging
- Adjustable measurement speed for fast readout or better accuracy
- Fast measurement speed up to 20 ms/reading to increase manufacturing throughput
- Offset voltage compensation (OVC)\*
- Cable compensation (0 ADJ)
- BIN comparator function to sort components in up to 10\* bin locations
- Bin-sorting with statistical measurement
- Store/recall 30 instrument settings
- Screen capture to USB drive
- Selectable power line filter
- Trigger delay
- Handler interface for easy integration with a component handler
- Standard RS232, USB (USBTMC and virtual COM), and LAN\* interfaces
- \* model 2841 only


# **Front panel**



#### Intuitive user interface

The touch screen and keys both provide a convenient interface for setting parameters quickly and precisely. Both models also support one touch zoom to enhance the readability of displayed measurements.

# **Rear panel**

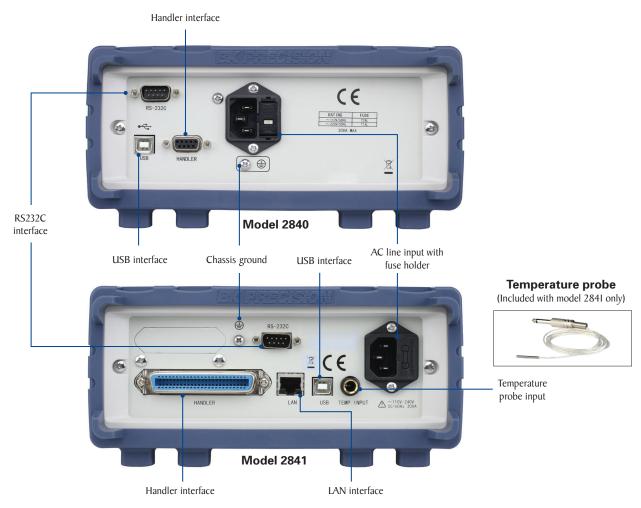

2 bkprecision.com

#### **Powerful features**

#### Bin sorting function




Quickly sort components using the I0 bins of the 284I or 3 bins of the 2840. The results can be displayed on the screen or output via the handler interface. High and low limits for each bin can be set up in absolute or tolerance mode.

#### Offset voltage compensation (OVC)

OVC switches the polarity and averages the forward and reverse polarity readings. This enables accurate measurements by minimizing the adverse effects of thermal EMFs or small biases in a circuit (e.g., from a capacitor's dielectric absorption when measuring a PCB trace).

#### **Temperature correction**

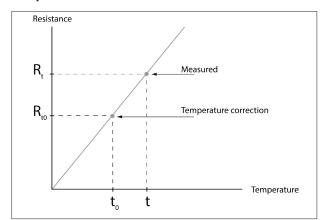

The 284l can compensate for temperature changes with a component's known temperature coefficient of resistivity. This allows for increased comparison accuracy between components that are measured at different temperatures.

#### LPR (Lower Power Resistance) measurement

In standard resistance measurement mode (LPR OFF), the large drive current (I A max.) may damage sensitive components or circuits. LPR mode protects the DUT by limiting the maximum power being applied.


#### **Applications**

#### Component testing



Measure the resistance of motor and transformer windings, relay and switch contacts, and other conductive materials and components. 4-wire Kelvin test leads included with both models.

#### Circuit board testing

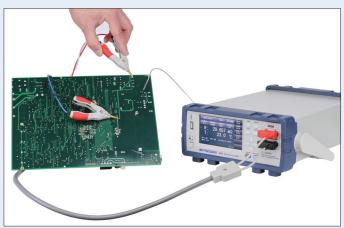

The resistance meters' high accuracy make them suitable for measuring trace resistances and finding shorts on PCBs.

3 bkprecision.com

2840 Series

# **Specifications**

Specifications are valid after temperature stabilization period of I5 minutes over an ambient temperature range of 23 °C  $\pm$  5 °C.

#### **Resistance Measurements**

Model 2840					
LPR OFF					
Resistance Range	Current	Resolution	Accuracy (rdg% + digits) <sup>1</sup>	Maximum Open Terminal Voltage	
20 mΩ	1 A	Ι μΩ	0.1 + 3		
200 mΩ	100 mA	10 μΩ		0.7 V	
2 Ω	IOO IIIA	100 μΩ			
20 Ω	10 mA	l mΩ	0.1 + 2		
200 Ω	1 mA	10 mΩ	0.1 + 2	2.1/	
2 kΩ	1004	100 mΩ		3 V	
20 kΩ	100 μΑ	ΙΩ			
LPR ON					
2 Ω	10 mA	100 μΩ			
20 Ω	1 mA	ImΩ	0.2 + 5	40 mV	
200 Ω	100 μΑ	10 mΩ	0.2 + 3	40 mV	
2 kΩ	10 μΑ	100 mΩ			

Accuracy = (measurement value x rdg) + (least significant digit)

Model 2841				
LPR OFF				
Resistance range <sup>3</sup>	Current	Resolution	Accuracy (rdg% + FS%)	Maximum Open Terminal Voltage
20 mΩ	1 A	0.1 μΩ	0.25+0.001	5 V
$200~\text{m}\Omega^2$	IA	Ι μΩ	0.25+0.001	3 V
$200~\text{m}\Omega^2$	(selectable) 100 mA	Ι μΩ	0.35+0.001	
2 Ω	100 mA	10 μΩ	0.035+0.001	
20 Ω	10 mA	100 μΩ	0.025+0.001	2.6 V
200 Ω	IU IIIA	l mΩ	0.01+0.001	
2 kΩ	1 mA	$10~\text{m}\Omega$	0.01+0.001	
20 kΩ	100 4	$100~\mathrm{m}\Omega$	0.01+0.005	
100 kΩ	100 μΑ	ΙΩ	0.01+0.003	
ΙΜΩ	10 μΑ	10 Ω	0.02+0.001	13 V
10 MΩ	IμA	100 Ω	0.1+0.006	13 V
100 MΩ	100 nA	IkΩ	0.8+0.060	
LPR ON				
2 Ω	10 mA	100 μΩ		
20 Ω	1 mA	l mΩ	0.05+0.001	60 mV
200 Ω	100 μΑ	10 mΩ	0.03+0.001	OU IIIV
2 kΩ	10 μΑ	100 mΩ		

Accuracy = (measurement value x rdg%) + (resistance range x FS%)

# **Temperature Measurements (Model 2841 only)**

Pt500				
Temperature range	Resolution	Accuracy in six months	Accuracy in one year	
-10.0 °C to 39.9 °C	0.1 °C	±0.30%rdg ± 0.5 °C	±0.45%rdg ± 0.8 °C	
40.0 °C to 99.9 °C	0.1 °C	±0.30%rdg ± 1.0 °C	±0.45%rdg ± 1.5 °C	

Accuracy = 0.3% x measured value  $\pm 0.5$  °C

Analog Input			
Input voltage range	Temperature range display	Resolution	Accuracy
0 to 2 V	-99.9 °C to 999.9 °C	I mV	$\pm 1\% T_R \pm 3 \text{ mV}$

Accuracy =  $1\% \times (T_R - T_{0V}) + 0.3\% \times (T_{1V} - T_{0V})$ 

 $T_{IV}$ : The temperature measured under input voltage of I V.

 $T_{\rm OV}$ : The temperature measured under input voltage of 0 V.  $T_{\rm R}$ : The current measured temperature.

bkprecision.com

<sup>&</sup>lt;sup>1</sup> - Test speed set to Slow2

 $<sup>^2</sup>$  - Current for the 200  $m\Omega$  range can be selected in the measurement setup menu.

 $<sup>^{3}</sup>$  - Measurement display is 5 1/2 digits for ranges 20 m $\Omega$  to 20 k $\Omega$ , 5 digits for ranges 100 k $\Omega$ to I00 MΩ

# **Specifications**

Model		2840		2841	
Measurement Func	Measurement Function				
FAST		10 ms		7 ms	
Resistance Measurement Time (typical) <sup>1</sup>	MED	25 ms		22 ms	
	SLOWI	IIS	ms	102 ms	
Time (gyptear)	SLOW2	455	ms	402 ms	
Temperature M	easurement Time	- 100 ± 10 ms		100 ± 10 ms	
Measuring	g Terminals		4 term	inals	
Aver	raging		I to	255	
Range	e Mode		Auto and	Manual	
Trigge	r Mode		Internal, Manua	, External, Bus	
mR +	b Mode	Apply a r	multiplier (m) and offset (b) to t	he measurement (R). (2841 model only)	
LPR	Mode	Rar	nges 20 $\Omega$ , 200 $\Omega$ , 2 k $\Omega$ , maxim	ium open terminal voltage: 60 mV	
Statistical Meas	urement Function	AVG, MAX, MIN, OSD (Ove	rall standard deviation), SSD (Sa	ample standard deviation), Process capacity index (Cp, Cpk)	
Comparator (bin so	rting) Function	1			
	Signal output		IN, HI	, LO	
Comparator	Beep mode	OFF, IN, HI, LO			
	Limit setup mode	Absolute value high/low limit, Percentage high/low limit + nominal value			
Bin S	Sorting	3 bins, absolute value/percentage 10 bins, absolute value/percentage			
General					
	Voltage	IIO VAC	220 VAC	II0 to 240 VAC $\pm$ I0 %	
AC input	Frequency	60 Hz	50 Hz	50 to 60 Hz	
	Power Consumption	< 30 VA			
Dis	splay	4.3", 480 x 272 TFT Color (24-bit) LCD touch screen		(24-bit) LCD touch screen	
Remote	Interface	USB (USBTMC or virtual COM), RS232		USB (USBTMC or virtual COM), RS232, LAN	
Handler	Handler Interface		9-pin connector 50-pin con		
Storage Memory		Save/recall 30 instrument settings			
Operating Temperature		0 °C to 40 °C, ≤ 80% RH			
Storage Temperature		5 °C to 40 °C, ≤ 85% RH			
Dimensions (W $x$ H $x$ D)		8.46" x 3.5" x 14.17" (215 mm × 89 mm × 360 mm)		nm × 89 mm × 360 mm)	
Weight		8.6 lbs (3.9 kg) 6.45 lbs (2.92 kg)		6.45 lbs (2.92 kg)	
Warranty		3-Years			
Included Accessories		AC power cord, user manual (downloadable), Kelvin test leads (TLDKI), temperature probe TPTC2 (model 284I only), test report and certificate of calibration			

 $<sup>^{\</sup>rm I}$  - When DISPLAY is OFF; when DISPLAY is ON, 20 ms should be added.

5 v011223 bkprecision.com

#### **About B&K Precision**

For more than 70 years, B&K Precision has provided reliable and value-priced test and measurement instruments worldwide.

Our headquarters in Yorba Linda, California houses our administrative and executive functions as well as sales and marketing, design, service, and repair. Our European customers are most familiar with B&K through our French subsidiary, Sefram. Engineers in Asia know us through our B+K Precision Taiwan operation. The independent service center in Singapore services customers in Singapore, Malaysia, Vietnam, and Indonesia.



### **Quality Management System**

B&K Precision Corporation is an ISO9001 registered company employing traceable quality management practices for all processes including product development, service, and calibration.

ISO9001:2015

Certification body NSF-ISR Certificate number 6Z241-IS8

#### Video Library

View product overviews, demonstrations, and application videos in English, Spanish and Portuguese.

http://www.youtube.com/user/BKPrecisionVideos

# **Product Applications**

Browse all of our supported product and mobile applications. http://bkprecision.com/product-applications

