

HIOKI

WIRELESS MINI LOGGER
LR8512, LR8513, LR8514, LR8515, LR8520



For easy-to-use loggers, look no further!

Connect to a tablet, smartphone,
or PC for easy, wireless data collection



 **Bluetooth®**
Please see www.hioki.com for
list of supported regions.

Connect to a tablet, smartphone, or PC for easy, wireless data collection

Use your tablet or PC to collect data even as signals are being logged.

Check data immediately and on-site.

No more complicated logger registration. Just touch to detect, and touch to register.



■ Real-time monitoring

 **Bluetooth**[®]
Wireless Communication

LR8410-20



By using the Hioki LR8410-20 to acquire data, you can view the waveforms in real time. Furthermore, previous waveforms can be viewed while the device is taking measurements.

WIRELESS LOGGING STATION LR8410-20

■ Specifications

Supported devices	WIRELESS LOGGING STATION LR8410-20
Communication range	30 m (line of sight)
Number of available registrations	Max. 7 units

Tablet, Smartphone

Android Terminal

Operating procedure

1 Setting and measurement

Use your Android terminal to set and send measurement conditions such as the recording interval, to the logger to begin measurement.



*Settings cannot be changed directly on the logger.

2 Data collection

Collect the data recorded in the logger after or even during measurement.



3 Data analysis


Connect a USB cable to transfer the data to a PC. Use the bundled software, "Logger Utility," to perform analysis.



Specifications

Supported devices	Android tablet / Android smartphone
Communications	Bluetooth®2.1 + EDR
Android OS	4.0.3 or later
Number of available registrations	Max. 100 units
Recommended display size	7 inches or larger
Software	Collection: Wireless Logger Collector for Android Analysis: Logger Utility (PC)
Software acquisition	Collection: Download from Google Play Analysis: Supplied CD-R / Download from HIOKI's website

Setting screens

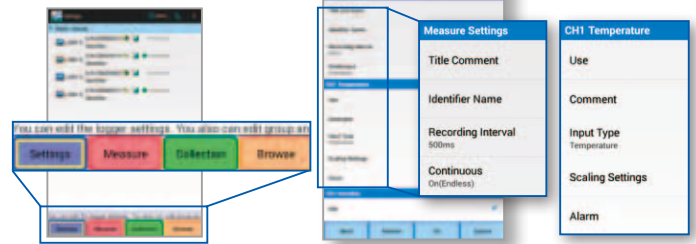

Waveform monitoring

Even during measurement, you can check recent data trends in waveform and values. This is also convenient for checking the levels before actual recording.



Portable and convenient

The user interface is perfect for the small screens of tablets or smartphones.

Check waveforms on-site

You can check the collected data on your tablet or smartphone.

Computer

Windows PC

Operating procedure

1 Setting and measurement

Use your Windows PC to set and send measurement conditions such as the recording interval, to the logger to begin measurement.



*Settings cannot be changed directly on the logger.


2 Data collection

Collect the data recorded in the logger after or even during measurement.



3 Data analysis

Start "Logger Utility" and perform analysis at the touch of a button.




Specifications

Supported devices	Windows PC / Windows tablet
Communications	Bluetooth®2.1 + EDR
OS	Windows 10 / 8 / 7 / Vista (32/64bit)
Number of available registrations	Max. 100 units
Software	Collection: Wireless Logger Collector Analysis: Logger Utility
Software acquisition	Supplied CD-R / Download from HIOKI's website


Periodic collection

You can automatically collect data at intervals from 10 minutes to 1 day. Avoid the trouble of going around to collect data.

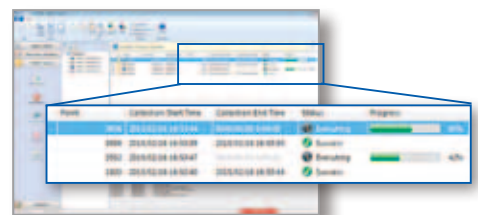


Status monitoring

You can periodically monitor information such as the latest measurement, remaining battery power, and signal strength.

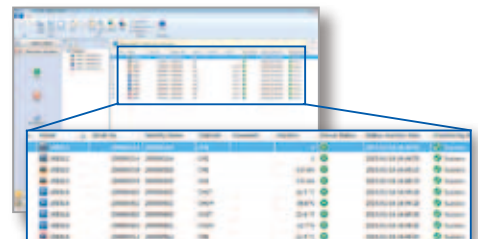

Multi-device management

Centrally manage up to 100 loggers. Since you can group devices in a tree structure, management is very easy.



Here's why the "WIRELESS MINI" is for you

Select from 5 types to match your application.

All models have 2 channels*, with built-in high-capacity memory for long-term recording. Compact and space-saving, the mini loggers can be easily installed in locations where wiring is difficult.

*The LR8520 has 1 channel of input and 1 channel of alarm output.



Pulse : LR8512



Load/leakage current : LR8513



Temperature/humidity : LR8514, LR8520




Voltage / temperature : LR8515

Wireless


30 m line-of-sight, up to 100 devices

Built-in Bluetooth® wireless technology. Communication reaches 30 m, line-of-sight. (This varies depending on the performance of the communicating tablet or PC.) Manage up to 100 devices.



Automatic synthesis of acquired data into a single piece of data

No matter what time during measurement you collect the data, data is automatically merged together into one single file. You don't need to manually synthesize data.

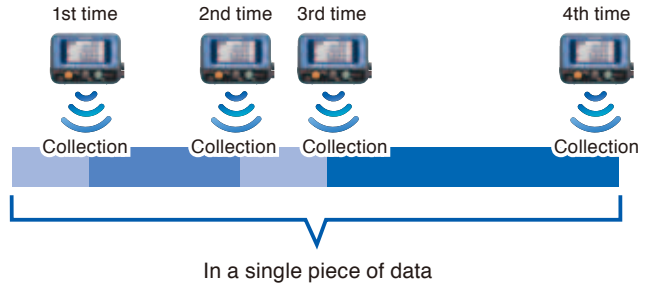

Make measurements inside panels or other difficult-to-wire locations

Installing a data logger in a switchboard or control panel has never been easier. Gone is the need to feed wiring through the panel—data collection is done wirelessly so you can close the panel door for safe measurements.

The loggers are also useful for measuring in difficult-to-wire locations, like high places or on moving machines.

Compact with Built-in High-capacity Memory


Install in tight spaces

Pocket size for installation anywhere. Use the optional MAGNETIC STRAP to hang it on a wall – solving all of your installation space problems.



2 channels built in all models

All models have 2-channels built in, so you can measure 2 locations simultaneously. With the LR8515, you can measure both voltage and temperature with a single device. *The LR8520 has 1 channel of input and 1 channel of alarm output.



Record up to 500,000 pieces of data per channel

Despite their compact size, the mini loggers' built-in high-capacity memory offers plenty of space for you to perform long-term recording with peace of mind.

Recording intervals	Recordable time
0.1 sec	13 hr, 53 min, 20 sec
1 sec	5 days, 18 hr, 53 min, 20 sec
10 sec	57 days, 20 hr, 53 min, 20 sec
1 min	347 days, 5 hr, 20 min, 00 sec
2 min to 60 min	Over 365 days

Selectable recording modes

One time recording:

Once the memory is full, the logger stops recording. Prevents data from being overwritten and protects important data.

Endless recording:

Once the memory is full, the logger begins overwriting old data. You can always keep the latest 500,000 pieces of data.

Free Run NEW

Excluding LR8512

Update the current value display even while measurement is stopped


ON/ OFF selection. The measurement value is indicated every 1 second while measurement is stopped. (the data is not saved in the memory.) The measurement value is saved in the memory every recording interval and indicated every 1 second regardless of recording interval setting while measuring. (when the setting of recording interval is less than 1 second, the measurement value is indicated every recording interval)

Power-saving Design

Power-saving function for longer battery life

Set to turn on the Bluetooth® only during a pre-set time period. The shorter the power is on, the longer the battery will last.

Example: To configure the instrument so that Bluetooth® is automatically turned on from 9:00 am to 12:00 pm every day, allowing data to be captured during that time period [Settings] Schedule: Daily, Data reception start time: 9:00 am, Reception time: 3 hr.

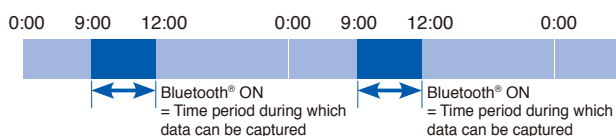

Continuous operating time (Battery)

Detailed conditions: Recording interval, Bluetooth® on/off

Conditions	LR8512	LR8513	LR8514, LR8520	LR8515
1 min, OFF	2 months	3 months	3.5 months	2.5 months
1 sec, OFF	2 months	1 months	3 months	10 days
1 sec, ON	14 days	10 days	20 days	7 days

*When Bluetooth® is constantly on or constantly off.

*When using the free run function, the continuous operating time is the same as when using a recording interval of 1 sec., even when measurement is stopped.

If recording for a long period of time, we recommend using the AC ADAPTER.



For pulse totalization and measuring logical ON/OFF signals or revolutions

WIRELESS PULSE LOGGER LR8512



For applications such as:

Air conditioning (flow rate), automobiles (flow rate, vehicle speed), cogeneration (flow rate)

Easily manage and record flow rates

Record and manage flow rates for liquids such as water, gas, and petroleum. You can measure the flow meter's output signal (pulse) to visualize daily fluctuations.



Specifications

(Accuracy guaranteed and Post-adjustment accuracy guaranteed for 1 year)

No. of input channels	2 channels (common GND)
Measurement modes	Integrating (cumulative/Instant), Revolution, Logic (Records an I/O for each recording interval)
Supported input format	Non-voltage "a" contact (always-open contact point), open collector, or voltage input (DC 0 V to 50 V)
Recording intervals	0.1 to 30 sec, 1 to 60 min, 16 selections
Recording modes	Instantaneous value
Dimensions, Weight	85W×61H×31D mm (3.35W×2.40H×1.22D in), 95 g (Not including the battery)

Pulse input

Pulse input cycle	200 μ s or higher when the filter is set to OFF (must be 100 μ s or higher in H period and L period.) 100 ms or higher when the filter is set to ON (must be 50 ms or higher in H period and L period.)		
Measurement objects	Range	Max. Resolution	Measurement Range
Totalization	1000M pulse f.s.	1 pulse	0 to 1000 M pulse
No. of revolutions	5000/n [r/s] f.s.	1/n [r/s]	0 to 5000/n [r/s]

*n is the number of pulses, 1 to 1000, per revolution.

Models and accessories

*AC Adapter is not included.

Model: WIRELESS PULSE LOGGER LR8512


Model No. (Order Code): LR8512

Accessories: CD-R (Instruction Manual, Logger Utility, Wireless Logger Collector) × 1, Measurement Guide × 1, Caution for Using Radio Waves × 1, AA alkaline batteries (LR6) × 2 Connection Cable L1010 × 2

Exclusive options

*Please see last page for shared options.

CONNECTION CABLE L1010
1.5 m (4.92 ft)
Bundled and also available for additional purchase



Supports voltage input and thermocouple types K and T with a single device

WIRELESS VOLTAGE/ TEMP LOGGER LR8515



For applications such as:

Various tests for electronics/automobiles/transportation, PV maintenance

Record voltage and temperature with a single device

You can use a single device to measure everything from the minute voltages of pyranometers or heat flow sensors to battery voltage.

Also view the correlation between voltage and temperature.



Specifications

(Accuracy guaranteed and Post-adjustment accuracy guaranteed for 1 year)

No. of input channels	2 ch (isolated; select voltage of thermocouple for each channel)
Measurement items	Voltage/ Thermocouple (K, T)
Input terminals	M3 screw type terminal block (2 terminals per channel)
Maximum input voltage	DC±50 V
Max. inter-channel voltage	DC 70 V
Recording intervals	0.1 to 30 sec, 1 to 60 min, 16 selections
Recording modes	Instantaneous value
Dimensions, Weight	85W×75H×38D mm (3.35W×2.95H×1.50D in), 126 g (Not including the battery)

Measurement ranges

Measurement objects	Range	Max. Resolution	Measurable Range	Measurement Accuracy	
Voltage	50 mV f.s.	0.01 mV	-50 mV to 50 mV	±0.05 mV	
	500 mV f.s.	0.1 mV	-500 mV to 500 mV	±0.5 mV	
	5 V f.s.	1 mV	-5 V to 5 V	±5 mV	
	50 V f.s.	10 mV	-50 V to 50 V	±50 mV	
Thermocouples	K	1000 °C f.s.	0.1 °C	-200 °C to -100 °C	±1.5 °C
				-100 °C to 999.9 °C	±0.8 °C
	T	1000 °C f.s.	0.1 °C	-200 °C to -100 °C	±1.5 °C
				-100 °C to 0 °C	±0.8 °C
				0 °C to 400 °C	±0.6 °C

Reference junction compensation: Switchable between internal and external

Reference junction compensation accuracy: ±0.5°C

(When using internal compensation, add to thermocouple measurement accuracy.)

Temperature characteristics: Add (measurement accuracy × 0.1)/°C to measurement accuracy.

Models and accessories

*Thermocouples and AC Adapter are not included.

Model: WIRELESS VOLTAGE/ TEMP LOGGER LR8515

Model No. (Order Code): LR8515

Accessories: CD-R (Instruction Manual, Logger Utility, Wireless Logger Collector) × 1, Measurement Guide × 1, Caution for Using Radio Waves × 1, AA alkaline batteries (LR6) × 2

*Please see last page for shared options.



For simple measurements such as AC/DC load current or AC leakage current

WIRELESS CLAMP LOGGER LR8513



For applications such as:

PV maintenance, automobile tests, forklifts, railroads, equipment maintenance

Built-in average value and maximum value recording modes

The logger can record the average or maximum value for each recording interval using RMS values measured at a 0.5 sec. interval. Average and maximum values are useful when assessing 30 min. demand and peak leakage current, respectively.

Simple electrical measurement

Set the voltage and power factor for simple electrical measurements. Direct reading on this device is possible for single-phase, two-wire systems.



Specifications (Accuracy guaranteed and Post-adjustment accuracy guaranteed for 1 year)

No. of input channels	2 channels (common GND)
Measurement items	AC load current, DC load current AC leak current (using current sensor)
Effective value calculation	Software calculates the true RMS value
Measurement ranges	AC 500.0 mA to 2000 A (with current sensor) DC 10.00 A to 2000 A (with current sensor) *Current and leak current that occur intermittently cannot be measured.
Measurement accuracy	±0.5% rdg. ±5 dgt. (DC, AC 50/60 Hz) *Add the sensor's accuracy when the current sensor is connected
Recording intervals	0.5 to 30 sec, 1 to 60 min, 14 selections
Recording modes	Instantaneous value, average value, Maximum value recording
Dimensions, Weight	85W×75H×38D mm (3.35W×2.95H×1.50D in) mm, 130 g (Not including the battery)

Current sensor specifications

AC leak current AC load current FLEXIBLE CURRENT SENSOR AC/DC load current

Sensor used	Core jaw diameter	Range	Max. Resolution	Measurable Range
9675	φ30 mm	500.0 mA	0.1 mA	AC 1.0 mA to 500.0 mA
		5.000 A	0.001 A	AC 0.010 A to 5.000 A
9657-10	φ40 mm	500.0 mA	0.1 mA	AC 1.0 mA to 500.0 mA
		5.000 A	0.001 A	AC 0.010 A to 5.000 A
9695-02	φ15 mm	5.000 A	0.001 A	AC 0.010 A to 5.000 A
		50.00 A	0.01 A	AC 0.10 A to 50.00 A
CT6500	φ46 mm	50.00 A	0.01 A	AC 0.10 A to 50.00 A
		500.0 A	0.1 A	AC 1.0 A to 500.0 A
9669	φ55 mm	1000 A	1A	AC 10 A to 1000 A
CT9667-01 /-02 /-03	-01: φ100 mm -02: φ180 mm -03: φ254 mm	500.0 A	0.1 A	AC 1.0 A to 500.0 A
		5000 A	1 A	AC 10 A to 5000 A
		50.00 A	0.01 A	AC 0.10 A to 50.00 A
CT7044	φ100 mm	50.00 A	0.01 A	AC 0.10 A to 50.00 A
CT7045	φ180 mm	500.0 A	0.1 A	AC 1.0 A to 500.0 A
CT7046	φ254 mm	5000 A	1 A	AC 10 A to 5000 A
CT7631 CT7731	φ33 mm	10.00 A	0.01 A	AC 0.10 A to 10.00 A DC± (0.10 A to 10.00 A)
		100.0 A	0.1 A	AC 1.0 A to 100.0 A DC± (1.0 A to 100.0 A)
CT7636 CT7736	φ33 mm	20.00 A	0.01 A	AC 0.10 A to 20.00 A DC± (0.10 A to 20.00 A)
		200.0 A	0.1 A	AC 1.0 A to 200.0 A DC± (1.0 A to 200.0 A)
CT7642 CT7742	φ55 mm	200.0 A	0.1 A	AC 1.0 A to 200.0 A DC± (1.0 A to 200.0 A)
		2000 A	1 A	AC 10 A to 2000 A DC± (10 A to 2000 A)

Models and accessories

* Current sensor and AC Adapter are not included.

Model: WIRELESS CLAMP LOGGER LR8513


Model No. (Order Code): LR8513

Accessories: CD-R (Instruction Manual, Logger Utility, Wireless Logger Collector) × 1, Measurement Guide × 1, Caution for Using Radio Waves × 1, AA alkaline batteries (LR6) × 2


Exclusive options

*Please see last page for shared options.

Clamp sensors



9675



9657-10



9695-02



9219



CT6500



9669



CT9667



CT7044/ 45/ 46
(CT7000 series)



CT7731/ 36/ 42, CT7631/ 36/ 42
(CT7000 series)

CT7731/36/42
Accurately measure and record even when the temperature changes

CT7631/36/42
Ideal for observing instantaneous waveforms in laboratories and other temperature-controlled environments



CT7000 series CM7290 For connecting the CT7000 series
CM7291 For connecting the CT7000 series, with Bluetooth® Smart
L9095 For connecting the CT7000 series

CONNECTION CABLE 9219 For connecting the 9695-02, cord length 3m

DISPLAY UNIT CM7290 For connecting the CT7000 series

DISPLAY UNIT CM7291 For connecting the CT7000 series, with Bluetooth® Smart

OUTPUT CORD L9095 For connecting the CT7000 series

Shared specifications LR8512, LR8513, LR8514, LR8515, LR8520

Control and communications	Bluetooth® 2.1+EDR (Communications range: 30 m, line of sight, security: SSP)
Storage capacity	500,000 data items for each channel
Operating temperature and humidity	Temperature: -20 to 60 °C (-4 to 140 °F), Humidity: 80%rh or less (non-condensing) (Depends on battery and current sensor specifications when they are in use)
Storage temperature and humidity	-20°C to 60°C, 80%rh or less (non-condensing) (With batteries removed)
Functions	Alarm, Scaling, Recording operation hold function, Erroneous operation prevention, Comment recording function, Power saving function, Authentication function, Free Run (excluding LR8512)
Display items	Measurement value, date, time, number of recorded data, maximum value, minimum value, and average value

Applicable standards	Safety	EN61010
	EMC	EN61326 classA, EN61000-3-2, EN61000-3-3
	Wireless certification	Japan: Incorporates a wireless module that has been certified as compliant with applicable technical standards. US: Part 15.247 (Contains FCC ID: QOQWT111A) Canada: RSS-210 (Contains IC: 5123A-BGTWT111A) EU: EN 300 328, EN 301 489-1, EN 301 489-17
Vibration endurance	JIS D 1601:1995 5.3(1), Category I: Vehicle, Condition: Category A equiv.	
Power source	AC adapter	AC ADAPTER Z2003 (sold separately, DC 12 V)
	Battery	AA alkaline batteries (LR6) × 2
	External power	DC 5 V to 13.5 V * can also be supplied from USB bus power, with a conversion cable



Compact with High Accuracy, Convenient for Recording Temperature and Humidity

WIRELESS HUMIDITY LOGGER LR8514, LR8520



For applications such as:

Environmental testing, construction, factories, storage, agriculture

Conduct surveys and verifications efficiently

Easily record and manage the surrounding temperature and humidity. The logger is helpful for status analysis, improvement, and verification.

In addition, the LR8514 can simultaneously record the temperature and humidity in 2 locations, allowing you to compared conditions inside and outside a piece of equipment, for example. (With 2 sensors installed)



Recording temperature and humidity in a server room

LR8520
(with 1 channel of alarm output)

A separate, detailed catalog is available for this model.

Specifications


*Only the temperature and humidity sensors affect the measurement accuracy and are subject to calibration. The LR8514 and LR8520 loggers do not require calibration.

	LR8514	LR8520
No. of input channels	2 ch for temperature + 2 ch for humidity (2 sensors can be attached)	1 ch for temperature + 1 ch for humidity (1 sensors can be attached)
Measurement objects	Temperature, Humidity	Temperature, Humidity, fungal index (calculated based on temperature and relative humidity)
Output	--	Outputs alarm signals
Temperature measurement accuracy (using Z2010/Z2011)	±0.5 °C (10 °C to 60 °C), using Z2010/ Z2011 If outside above temperature range: Add 0.015 °C/ °C (-40 °C to 10 °C) or 0.02 °C/ °C (60 °C to 80 °C)	
Humidity measurement accuracy (using Z2010/Z2011)	±3% rh (20 °C to 30 °C, 20% to 90% rh) If outside above range, see Figure 1.	
Recording intervals	0.5 to 30 sec, 1 to 60 min, 14 selections	
Recording modes	Instantaneous value	
Dimensions, Weight	85W×61H×31D mm (3.35W×2.40H×1.22D in), 95 g (Not including the battery)	

Measurement objects	Range	Max. Resolution	Measurable Range
Temperature	100 °C f.s.	0.1 °C	-40 °C to 80 °C
Humidity	100%rh f.s.	0.1 %rh	0 %rh to 100 %rh

Humidity measurement accuracy (fig. 1)

The accuracy of values indicated by the * mark is not guaranteed (reference values).

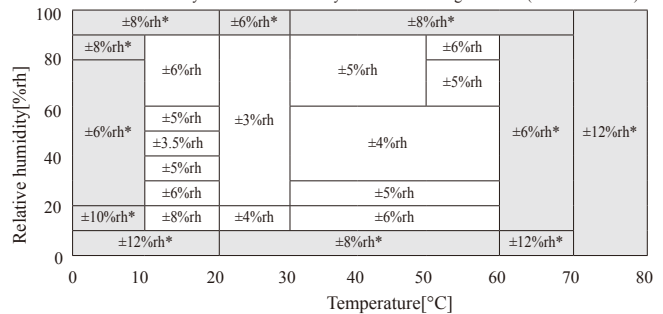

Models and accessories

* Temperature and humidity sensor, AC Adapter are not included.

Model: WIRELESS HUMIDITY LOGGER LR8514

Model No. (Order Code): LR8514

Accessories: CD-R (Instruction Manual, Logger Utility, Wireless Logger Collector) × 1, Measurement Guide × 1, Caution for Using Radio Waves × 1, AA alkaline batteries (LR6) × 2

Model: WIRELESS FUNGAL LOGGER LR8520

Model No. (Order Code): LR8520

Accessories: CD-R (Instruction Manual, Logger Utility, Wireless Logger Collector) × 1, Measurement Guide × 1, Caution for Using Radio Waves × 1, AA alkaline batteries (LR6) × 2, CONNECTION CABLE L1010 × 1

Exclusive options

*Please see below for shared options.



HUMIDITY SENSOR Z2010
50 mm (0.16 ft)



HUMIDITY SENSOR Z2011
1.5 m (4.92 ft)



CONNECTION CABLE L1010
1.5 m (4.92 ft)
Bundled and also available for additional purchase

Shared options



AC ADAPTER Z2003
100 to 240 VAC,
50/60Hz

For long-term recording



MAGNETIC STRAP Z5004



MAGNETIC STRAP Z5020
Strong type

*The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by HIOKI E.E. CORPORATION is under license.

Note: Company names and Product names appearing in this catalog are trademarks or registered trademarks of various companies.

HIOKI

HIOKI E. E. CORPORATION

HEADQUARTERS

81 Koizumi, Ueda, Nagano, 386-1192, Japan
TEL +81-268-28-0562 FAX +81-268-28-0568
http://www.hioki.com / E-mail: os-com@hioki.co.jp

HIOKI USA CORPORATION

TEL +1-609-409-9109 FAX +1-609-409-9108
http://www.hiokiusa.com / E-mail: hioki@hiokiusa.com

HIOKI (Shanghai) SALES & TRADING CO., LTD.
TEL +86-21-63910090 FAX +86-21-63910360
http://www.hioki.cn / E-mail: info@hioki.com.cn

DISTRIBUTED BY

HIOKI SINGAPORE PTE. LTD.
TEL +65-6634-7677 FAX +65-6634-7477
E-mail: info-sg@hioki.com.sg

HIOKI KOREA CO., LTD.
TEL +82-2-2183-8847 FAX +82-2-2183-3360
E-mail: info-kr@hioki.co.jp