

P16i

Ultimate all-in-one fault locating system

The P16i is the ultimate all-in-one solution for troubleshooting, pre-locating and pinpointing of cable faults in complex LV & MV networks. Menu guided computerised operation allows to detect and precisely locate any possible fault for even unexperienced users. Featuring a large coloured 10,4" screen the P16i can display measurement curves, settings and message codes simultaneously. Integrated full scale TDR capability including the high voltage ARTi mode will isolate

and pre-locate low and high resistance faults with utmost precision. Consequently, precise pinpointing will take much less time. Fast HV surge pulse cycles of 3 sec. with up to 2000 Joules energy provide for even the most demanding locating jobs. The multi-dimensional safety system PROSAFE 3D ensures maximum safety for the instrument, the operator and DUT. The optional pinpointer Kamphone and Locator S are used for flash-over faults or cable sheath faults respectively.



- + Integrated & Automatic System
- + High 1000 Joule Multi-Range Output
- + Portable With Low Weight

APPLICATIONS & FEATURES

- Comprehensive fault locating in underground LV & MV networks;
- Comprehensive, covering full cycle from trouble-shooting to isolating and precise fault pinpointing;
- One central unified control unit for all measurement modes and settings;
- App-style based user interface for easy operation;
- Rotary encoder operation for precise parameter setting;
- Multilayer PROSAFE protection & safety system;
- Possibility to upgrade to fully equipped cable test van.

SPECIFICATIONS

Analysis & test of faults:

| | |
|------------------|---------------------|
| IR mode (opt.) | 10kΩ to 200MΩ @ 5kV |
| HV DC mode | 0 to 20kV |
| Sheath test mode | 0 to 16kV |

Isolation of faults:

| | |
|--------------------------|-----------------------------|
| TDR range | 90km |
| TDR impulse / widths | 160V / 50ns to 10μs |
| TDR resolution | 0,2m |
| TDR impedance matching | 25 to 1600Ω |
| pre-location TDR-LV mode | 1-phase over HV cable |
| Optional | 3-phase over LV cable |
| Optional | Intermittent Fault Scanning |
| pre-location TDR-HV mode | ARTi: 16kV (Arc Reflection) |
| Optional | SCC: 16kV (Surge Current) |
| Optional | DVC: 20kV (Decay Voltage) |
| fault conditioning | 500mA |
| Optional | 1,5A |

Mapping of faults:

| | |
|---------------------------|--------------------------------|
| max. Surge voltage levels | 8/16kV |
| max. Surge energy | 1000J (per level) |
| Optional | 2000J (per level) |
| range Surge pulse cycles | 2000J @ 3s to 10s; single shot |
| Sheath pinpointing (opt.) | 0 to 12kV; 1:3, 1:6, 3:1, 6:1 |

GENERAL DATA

| | |
|-----------------------|-------------------------|
| safety | PROSAFE 3D or 5D system |
| dimensions | 430 x 516 x 875mm |
| IP rating | IP54 |
| weight | 90kg |
| mains supply | 230V, 50Hz |
| operating temperature | -10°C to +55°C |


SCOPE OF SUPPLY

P16i (Basic)
Set of connection cables (5m) incl. cable bag
FU/EP sensor kit
User manual on CD

OPTIONS

Rugged version with trolley
Pinpointer: Kamphone & Locator S
Connection Kits: 25m or 50m (HV+LV)
P16e without TDR and ARTi

P16i Highlights

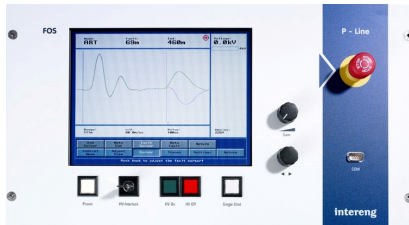

SMART USER INTERFACE

All measurement modes and system settings are controlled by one control unit. The intuitive app-style organised software interface will guide inexperienced as well as experienced users alike. Operation is simple with a menu following the standard algorithm of fault locating. A rotary encoder helps to set precise measurement values. The clear and concise 10.4" display shows extensive information at all time with plain fault messages indicating operating mistakes or internal device failures.



PROSAFE 3D SAFETY

The advanced multi-layer safety system covers the following dimensions:

PROSAFE 3D (STANDARD)

- 1D Integrated emergency switch off & safety key lock
- 2D Guarded Discharge Technology
- 3D Faulty ground conditions monitor (FU/EP)

PROSAFE 5D (OPTIONAL)

- 4D Separation transformer
- 5D Extra residual voltage monitor




TOOLS FOR ANALYSIS & TESTING

Accurate troubleshooting of cable faults will increase the efficiency of subsequent fault locating procedures. Moreover, it helps to avoid stress on the cable resulting from employing less suitable locating technologies.

The following analytical modes are available:

- Insulation resistance measurement (opt.)
- HV test with leakage current measurement and recording
- Sheath fault test mode with current recording

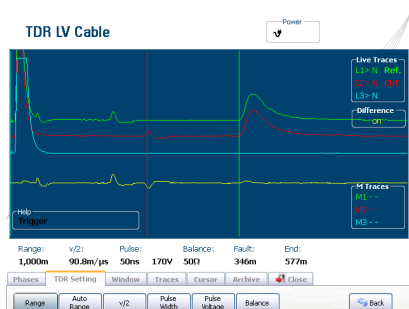

TOOLS FOR ISOLATION & PRE-LOCATION

The integrated precision TDR can pre-locate high resistance faults within a narrow range by employing inductive Arc Reflection Technology (ARTi). A major advantage is the no-loss HV impulse voltage & energy conversion and thus full application to the cable fault.

The following additional options are available:

- TDR-3phase mode for simultaneous multiphase analytics
- TDR-IFS mode for intermittent fault scanning
- High current (1,5A) fault conditioning for "wet" faults



TOOLS FOR MAPPING & PINPOINTING

Effective fault isolation is mandatory for complex cable faults. After that precise pinpointing using the acoustic discharge method will be an easy procedure. Simple computerized setting of parameters and high surge energies of up to 2000 Joule will allow to find faults fast. The following additional options are available:

- Kamphone pinpointer for flash-over faults
- Dedicated sheath fault pinpointing mode (SFP) and pinpointer Locator S for cable sheath faults